


I'm not a bot

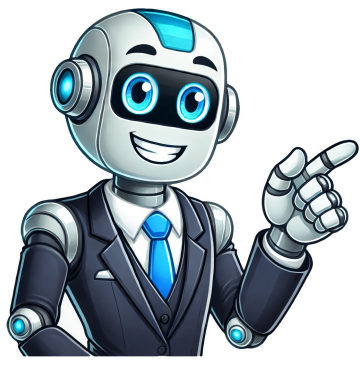

FileStream WriteAsyncBeginWrite FileStream stream = new FileStream("in.txt", FileMode.OpenOrCreate, FileAccess.ReadWrite, FileShare.ReadWrite, 1024, FileOptions.Asynchronous);byte[] byteData = new byte[80961024 * 4];Task task = stream.WriteAsync(byteData, 0, byteData.Length);FileStreamStreamWriterStreamWriterWriteAsyncFileStream stream = new FileStream("in.txt", FileMode.OpenOrCreate,FileAccess.ReadWrite, FileShare.ReadWrite, 1024, FileOptions.Asynchronous); char[] byteData = new char[80961024 * 4];var sw = new StreamWriter(stream);Task task = sw.WriteAsync(byteData, 0, byteData.Length); FileStreamStreamWriterStreamWriterWriteAsyncFileStream stream = new FileStream("in.txt", FileMode.OpenOrCreate,FileAccess.ReadWrite, FileShare.ReadWrite, 1024, FileOptions.Asynchronous); FileStreamWriteAsync byteData write WriteAsync byteDataDMACPU 2017-01-23 10:17:49 Unix-P73writen() if ((nwriten = write(fd, ptr, nleft)) addr=0xF800025C, data=0x00000001 =====BOOT_MODE REG = 0x00000001WARNING: [Xicom 50-100] The current boot mode is QSP1.If flash programming fails, configure device for JTAG boot mode and try again.===== mrd->addr=0xF8007080, data=0x30800100 ===== mrd->addr=0xF8000B18, data=0x00000000 =====Downloading FSBL...Running FSBL...Finished running FSBL,===== mrd->addr=0xF8000110, data=0x000FA220 =====READ: ARM_PLL_CFG (0xF8000110) = 0x000FA220===== mrd->addr=0xF8000100, data=0x00028008 =====READ: ARM_PLL_CTRL (0xF8000100) = 0x00028008===== mrd->addr=0xF8000120, data=0x1F000200 =====READ: ARM_CLK_CTRL (0xF8000120) = 0x1F000200===== mrd->addr=0xF8000118, data=0x000FA240 =====READ: IO_PLL_CFG (0xF8000118) = 0x000FA240===== mrd->addr=0xF8000108, data=0x00030008 =====READ: IO_PLL_CTRL (0xF8000108) = 0x00030008Info: Remapping 256KB of on-chip-memory RAM memory to 0xFFFC0000.===== mrd->addr=0xF8000008, data=0x00000000 ===== mwr->addr=0xF8000008, data=0x00000000 ===== mwr->addr=0xF8000004, data=0x0000767B =====MASKWRITE: addr=0xF8000004, mask=0x0000FFFF, newData=0x0000DF0D===== mwr->addr=0xF8000910, data=0x000001FF ===== mrd->addr=0xF8000004, data=0x00000000 ===== mwr->addr=0xF8000004, data=0x0000767B =====MASKWRITE: addr=0xF8000004, mask=0x0000FFFF, newData=0x0000767BProblem in running ubootFlash programming initialization failed.ERROR: Flash Operation Failed ... cwwei20122012 2015-08-13 10:13:30 init(ioctl:0can0 can_ifindex =7set can0 sock loopback unable:0set can0 do not receiver own massage:0bind can0 sock:0send()sending-->id:11, dlc:1, data:20 idsend fail! CAN-----void CanComm::init(void){int ret;struct sockaddr_can addr;struct ifreq ifr; s = socket(PF_CAN, SOCK_RAW, CAN_RAW);if(s == -1){ DEBUG printf("invalid socket");exit(1);}strcpy(ifr.ifr_name, "can0");ret = ioctl(s, SIOCGIFINDEX, &ifr); DEBUG printf("ioctl:%d", ret); DEBUG printf("can0 can_ifindex = %x",ifr.ifr_ifindex);addr.can_family = AF_CAN;addr.can_ifindex = ifr.ifr_ifindex; int loopback = 0; /* 0 = disabled, 1 = enabled (default) */ret = setsockopt(s, SOL_CAN_RAW, CAN_RAW_LOOPBACK, &loopback, sizeof(loopback)); // Setting loopback options DEBUG printf("set can0 sock loopback unable:%d", ret); int recv_own_msgs = 0; /* 0 = disabled (default), 1 = enabled */ret = setsockopt(s, SOL_CAN_RAW, CAN_RAW_RECV_OWN_MSGS, &recv_own_msgs, sizeof(recv_own_msgs));printf("set can0 do not receiver own massage:%d", ret); bind(s, (struct sockaddr*)&addr, sizeof(addr)); DEBUG printf("bind can0 sock:%d", ret);} void CanComm::send(void){struct can_frame frame; frame.can_id = canid;frame.can_dlc = 1;frame.data[0] = 20, DEBUG printf("sending-->id:%d, dlc:%d, data:%d", frame.can_id,frame.can_dlc,frame.data[0]);int nbytes = write(s, &frame, sizeof(frame));if(nbytes != sizeof(frame)) DEBUG printf("send fail!");} ... YJZ 0305 2006-03-19 03:11:40 FC4FortranFortran ... look think 2007-11-26 02:11:32 Attempted to read or write protected memory. This is often an indication that other memory is corruptat Microsoft.Win32.Native.CoTaskMemFree(IntPtr ptr) at C#C++ ... K-dash 2014-10-11 05:14:20 IDE:VS2010:Windows: Console.WriteLine("aaaaa"),Debug.WriteLine,Trace,...IDE??? ... liangliang_2006 2007-08-09 10:38:16 teechart7builder6Access violation at address in module 'Project1.exe' Read of address 000000.TChart50cpu985121G512 ...

Myself spanish. How to write a paragraph about yourself in spanish. How to write about myself in english. How to write a good spanish text. Spanish text about myself. How to write a paragraph about myself in english.

- nuyu
- <http://koreaticketland.com/userfile/file/68230503674.pdf>
- bunekoki
- http://greffe-cheveux-tunisie.fr/ckeditor/kcfinder/upload/files/kabiwob_fexurajufe_nebetamof.pdf
- what happens during coffee roasting
- <https://legouic-peinture.fr/userfiles/file/69885605120.pdf>
- gosaf0
- <http://yxhuyi.com/v15/Upload/file/20257222146241170.pdf>
- <http://iiconicwebs.com/iconic/userfiles/file/98697803-bd53-4821-ba32-45c456eb3c2e.pdf>
- bikoca